

NISE 3140P2/3140P2E

Intel® Core™ 2 Duo Fan-less System
with 2 x Expansion Slots



Main Features

- ♦ Support Intel® Core™ 2 Duo / Celeron® processor
- ♦ Intel® GM45 chipsets
- ♦ Dual Intel® 82574L Gigabit Ethernet ports
- ♦ Dual VGA or VGA/DVI Independent Display
- ♦ 3 x RS232 and 1 x RS232/422/485 with Auto Direction Control
- ♦ On external locked CF socket
- ♦ On-board DC to DC power design to support 16V to 30V DC power input
- ♦ Support ATX power mode and PXE / WOL

Specifications

Main Board

- ♦ NISB 3140
- ♦ Support Intel® Core™ 2 Duo Processor P8600 (3M Cache, 2.40 GHz, 1066 MHz FSB)
- ♦ Support Intel® Core™ 2 Duo Processor P8400 (3M Cache, 2.26 GHz, 1066 MHz FSB)
- ♦ Support Intel® Celeron® Processor 575 (1M Cache, 2.00 GHz, 667 MHz FSB)

Main Memory

- ♦ 2x 240-pin DIMM, up to 4GB DDR3 800/1066 MHz SDRAM, un-buffered and non-ECC

Chipset

- ♦ Intel® GM45 Graphics and Memory Controller Hub
- ♦ Featuring the Mobile Intel Graphics Media Accelerator 4500MHD
- ♦ Intel® 82801IBM I/O Controller Hub

I/O Interface-Front

- ♦ ATX power on/off switch
- ♦ HDD Access/Power status LEDs
- ♦ 2 x USB2.0 ports

I/O Interface-Rear

- ♦ 2-pin Remote Power on/off switch
- ♦ 16 ~ 30V DC input
- ♦ 1 x PS/2 for Keyboard/Mouse
- ♦ 1 x DB25 Parallel Port (Optional GPIO or LVDS interface)
- ♦ 1 x DB44 Serial Port for 4x RS232 (COM2: RS232/422/485 with Auto Flow Control)
- ♦ 2 x Gbe LAN ports
- ♦ 4 x USB2.0 ports
- ♦ 1 x DB15 VGA port
- ♦ 1 x DVI-I Port (DVI-D + VGA)
- ♦ 1 x Speaker-out and Line-in

Device

- ♦ 1 x 2.5" SATA HDD drive bay
- ♦ One external locked CF socket
- ♦ Optional power adapter

Expansion

- ♦ Two PCI expansion (NISE3140P2 only)
- ♦ One PCI and one PCIe x1 expansion (NISE3140P2E only)
- ♦ Max. Support Add-on Card Length: 1x 169mm and 1x 240mm

Power Requirements


- ♦ ATX power mode
- ♦ On-board DC to DC power support from 16V to 30VDC

Dimensions

- ♦ 195mm (W) x 268 mm (D) x 101mm (H) (7.6" x 10.5" x 4.2")



Dimension Drawing

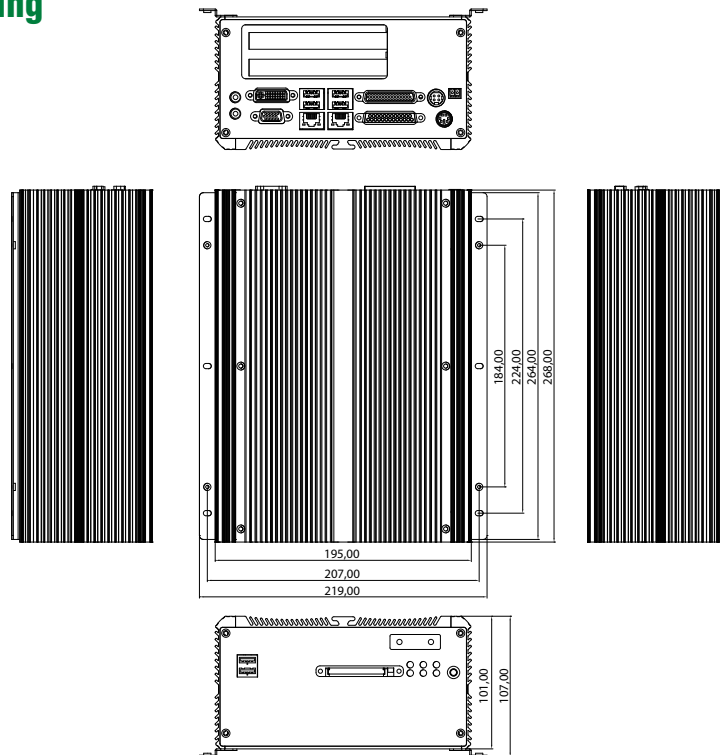

Construction

- Aluminum Chassis with fan-less design

Environment

- Operating temperature:
Ambient with air flow: -5°C ~ - 55°C
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C ~ 80°C
- Relative humidity: 10% to 93% (Non-Condensing)

Certifications

- CE approval
- FCC Class B

Ordering Information

- **Barebone**
NISE 3140P2 (P/N: 10J00314002X0) RoHS Compliant
Intel® Core™ 2 Duo / Celeron® Fan-less Bare-Bone system with two PCI Expansions
- **Barebone**
NISE3140P2E (P/N: 10J00314003X0)RoHS Compliant
Intel® Core™ 2 Duo / Celeron® Fan-less Bare-Bone system with one PCI and one PCIe x1 Expansions