



Main Features

- On-board Intel® Atom™ E640 1.0 GHz Processor
- On-board DDR2 1G Memory Chip
- 2x Intel® 82574L GbE LANs
- 3x USB2.0 / 1x VGA / 3x Serial Ports / 1x CAN bus
- 8CH GPI and 8CH GPO
- Support 1x 2.5" HDD Drive Bay
- Support 12V and 24V DC Input

Product Overview

Equipped with Intel® Atom™ E640 1.0 GHz processor and Intel® Platform Controller Hub EG20T, the NISE 91 fanless computer features low power consumption of only 15W and an abundance of I/O options to meet the requirements of factory and industrial automation control.

Featuring fanless design, the NISE 91 is able to offer optimum reliability and performance. In addition, the NISE 91 is equipped with an abundance of I/O interfaces, such as 2x antennas, GPIO, CAN BUS, 3x COM ports, two Intel® GbE LAN and DC Input (either 12V or 24V DC) that provide flexibility for various application designs.

Specifications

Main Board

- On-board Intel® Atom™ E640 1.0GHz processor, 512K Cache
- On-board chipset: Intel® EG20T

Main Memory

- On-board DDR2 1G memory chip, unbuffered and non-ECC support

Storage Device

- 1x 2.5" SATA HDD drive bay for optional SSD or HDD
- Support optional SATA DOM, horizontal type only

I/O Interface-Front

- 3x USB ports
- 2x RJ45 GbE LAN ports, Intel® 82574L controller on board, Support LAN teaming
- 3x DB9 serial ports
 - COM1: support RS232/422/485 (selected on BIOS menu)
 - COM2: support RS232 only
 - COM3: support RS232 only
- 1x DB9 CAN bus
 - Support CAN 2.0b protocol (support both 11-bit and 26-bit identifiers)
 - Support bit rates up to 1Mbps
 - Clock frequency of 40MHz

I/O Interface-Bottom

- 1x DB15 VGA port
- 1x DB15 male connector for 8CH General Purpose Input
- 1x DB15 male connector for 8CH General Purpose output
- 3-pin DC input, support 12V DC input and 24V DC input
- 1x power on/off switch

I/O Interface-Top

- 1 x internal mini-PCIe socket on board
- 2 x antennas for optional Wi-Fi module

Supported OS

- Windows XP
- Windows Embedded Standard 2009
- Fedora 14 (Kernel 2.6)


System Dimension

- 59mm(W)x 140mm(D)x 167mm(H)

Construction

- Aluminum chassis with fanless design

Dimension Drawing

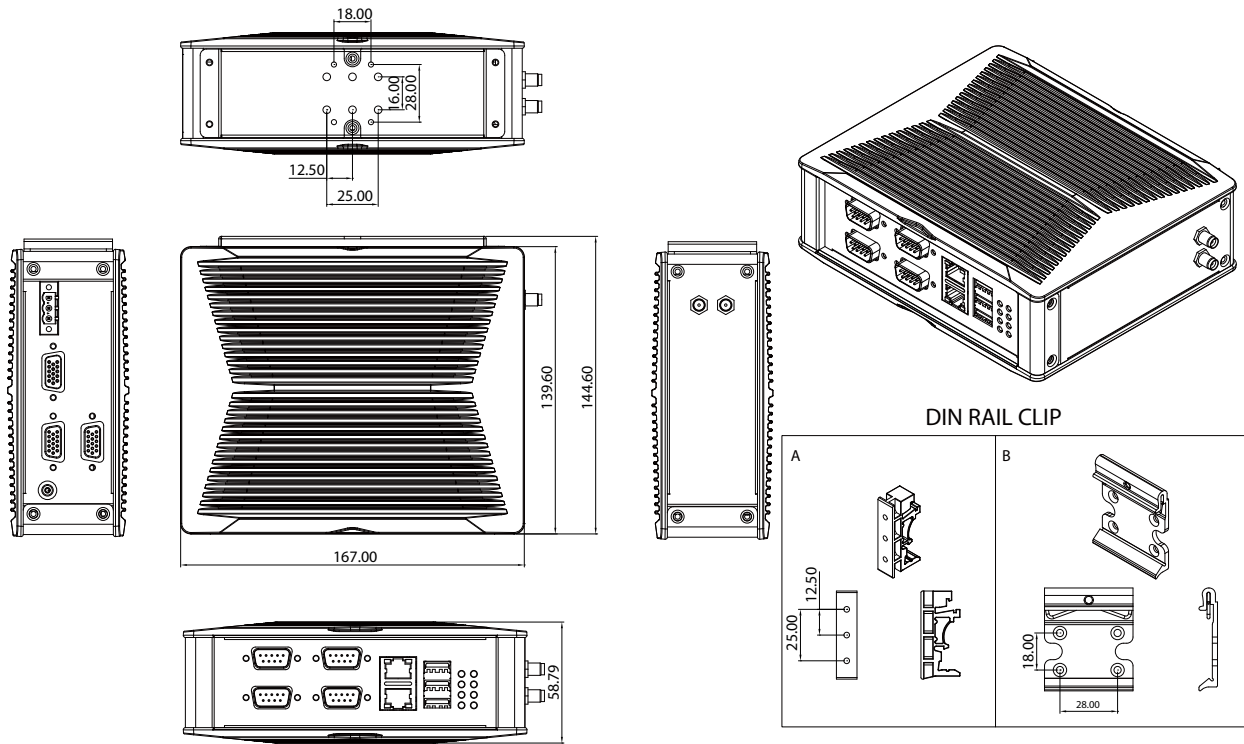

Environment

- Operating temperature:
Ambient with air flow: -5 ~ 55°C (According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20 ~ 80°C
- Relative humidity: 10% ~ 93% (non-condensing)
- Shock protection: 20G, half sine, 11ms, IEC60068-2-27
- Vibration protection
Random: 0.5Grms @5~500 Hz according to IEC68-2-64
Sinusoidal: 0.5Grms @5~500 Hz according to IEC68-2-6

Certifications

- CE
- FCC Class A

Ordering Information

- **NISE 91 (P/N: 10J00009100X0)**
DIN Rail fanless system with Intel® Atom™ E640 1.0 GHz processor and DDR2 1G memory on board
- **12V, 60W AC/DC power adapter w/o power core (P/N: 7400060014X00)**
- **Aluminum DIN Rail mounting kit (P/N: 88J00009001X0)**
- **Wallmount kit (P/N: 88J00009002X0)**