



- Low power consumption
- Compact and Fanless

- Intel[®] HD Graphics
- USB3.0 Support

Product Overview

Powered by Intel® Celeron® processors 847 processor, NDIS B322 can handle very rich multimedia contents. With Intel® Celeron® processor low power consumption feature, NDiS B322 supports display output by VGA and HDMI ports. NDiS B322 is ideal as entry level digital signage player for advertising, hospitality and brand promotion application.

Specifications

CPU Support

Intel[®] Celeron[®] Processor 847, Dual-Core, 1.1G, 17W

Chipset

Intel[®] NM70 Express Chipset

Graphics

Intel[®] HD Graphics

Main Memory

• 1 x 204-pin SO-DIMM sockets, Supports DDR3 1333/1066/800MHz non-ECC, un-buffered memory up to 8GB

I/O Interface-Front

- 1 x USB3.0
- 1 x USB2.0

I/O Interface-Rear

- 19V DC Power in
- 1 x VGA
- 2 x USB 2.0
- 1 x RJ45 with LEDs for 10/100/1000Mbps Ethernet
- 1 x Audio-out
- 1 x HDMI
- 1 x Mic-in

Storage

• 1 x 2.5" SATA HDD Bay

Dimensions

• 250 mm (W) x 194 mm (D) x 40 mm(H) (9.9" x 7.6" x 1.6") w/o mounting bracket

Power Supply

• 1 x External 65W AC/ DC power adapter

Expansion

• 1 x Half Mini PCI-E interface 802.11 b/g/n WLAN module (optional)

Environment

- Operating temperature: 0°C to +40°C
- Storage temperature: -20°C to +80°C
- Humidity: 10 to 90% (non-condensing)

Certification

- CE approval
- FCC Class A


Operating System

• Windows7 / Windows 8 / XP / WES7 / WES2009 / Linux

Box Player

www.nexcom.com



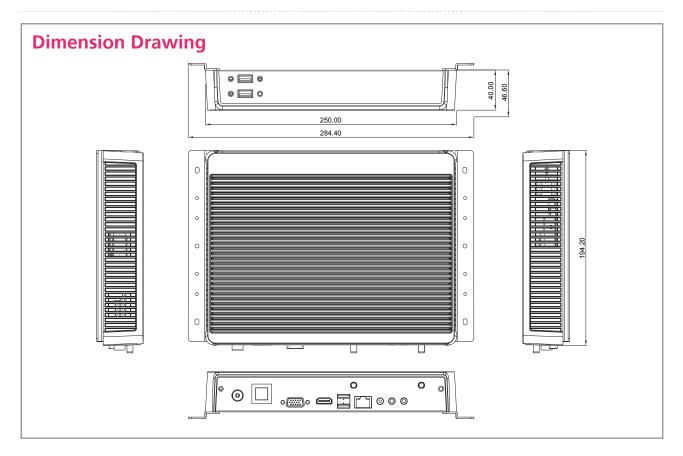

Ordering Information

• NDiS B322 (P/N: 10W00B32200X0)

Intel® Celeron® Processor 847, Dual-Core, 1.1G, 17W