NViS 8480



Main Features

- 4U 19-inch rackmount standard
- Supports Intel[®] Core[™] i7/i5 Quad Core processors
- Four DDR3 DIMM Sockets, up to 16GB DDR3 1066/1333 MHz SDRAM
- Dual Intel® Gigabit Ethernet ports

- 6 x USB2.0 / 1 x VGA/ 1 x/ DVI-D
- 4x PCIe expansion slots
- 6 x 3.5" SATA HDD bays for external
- Supported up to 8-cahnnal HD CCTV

Product Overview

NEXCOM expands its security surveillance offerings to HD CCTV with NViS 8480. Powered by 2nd generation Intel® Core™ i7/i5 desktop processors with Q67 chipset, NViS 8480 is able to display and playback Full HD videos through 8 channels. In addition, the storage capacity NViS 8480 holds can be as large as 12TB when all of its six 3.5″ SATA HDDs are utilized, offering massive storage capacity with good value.

Specifications

Main Board

• NEX 880

CPU Support

- Intel® Desktop Core™ i7 2600 Quad core processor (3.4 GHz, LGA 1155)
- Intel® Desktop Core™ i5 Quad core processor (2.6 GHzr, LGA 1155)

Main Memory

 4 x 240-pin memory DIMM sockets, up to 16GB DDR3 1066/1333 MHz SDRAM, un-buffered and non-ECC

Platform Control Hub

• Intel® Q67

I/O Interface-Front

- 6 x 3.5" external HDD try
- 4 x USB 2.0 ports
- System status LEDS

I/O Interface-Rear

- AC 100V to 240V input
- 1 x VGA DB-15 connector
- 1 x DVI-D port
- 4 x USB 2.0 ports
- 1 x Speaker-out / 1 x Line-in and 1 x Mic-in
- 2 x COM port

Storage

• 6 x 3.5" SATA HDD driver bay

Expansion


- 1 x PCle X8
- 1 x PCle X4
- 1 x PCle X1
- 1 x PCle X1

Dimensions

• 427mm (W) x 480 mm (D) x 176mm (H)

NE(COM 3.5" CPU Boards



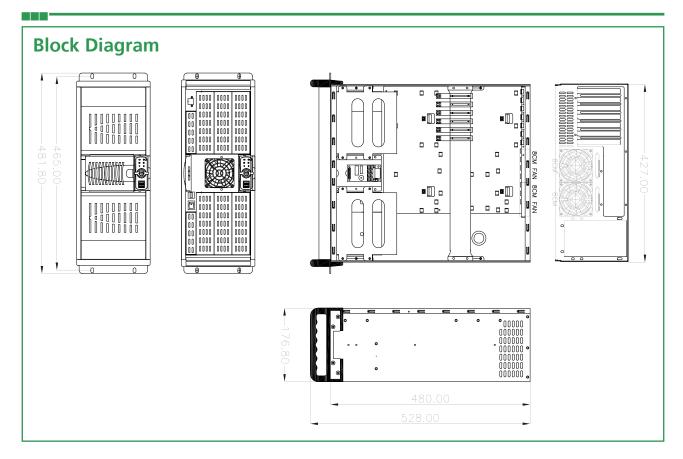

Construction

• 4U rackmount, heavy-duty steel chassis

Environment

- Operating temperature: Ambient with air flow: 0°C- 45°C (According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C- 70°C
- Relative humidity: 10%- 90% (non-condensing)

Certifications

- CE approval
- FCC Class A

Ordering Information

NVIS 8480 (P/N: 90C00848000X0) RoHS Compliant
4U HD CCTV Security Surveillance System with Intel® 2nd Generation
Core™ i7/i5 Processor