

OFC

Open Frame Computer

OFC-7915F /
OFC-7917F /
OFC-7919F

**Fanless and Low Power
Atom N270 Open Frame
Computer**

Features and Benefits:

- Intel® ATOM N270
- Supports Intel® 945GSE + ICH7M Chipset
- Totally fanless and quiet design
- Low power consumption and economical solution
- On-board IDE interface, Type II Compact Flash slot
- Optional slim SATA CD-ROM drive
- 24V DC power support, optional power adaptor for AC power
- Optional PCI Expansion slot (2 slots)



Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu District Taipei 114, Taiwan
TEL: +886-2-8751-1111 FAX: +886-2-8751-1199
E-mail: sales@protech.com.tw
<http://www.protech.com.tw>

Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870
TEL: +1-714-996-7200 FAX: +1-714-996-7300
Sales: sales@protech-usa.net
<http://www.protech-usa.net>

Protech Japan Co., Ltd.

OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku, Tokyo, 140-0013
TEL: +81-3-5753-8411 FAX: +81-3-3763-9282
E-mail: sam@protech-j.com
<http://www.protech-j.com>




ISO CERTIFIED
9001 | 14001

OFC-7915F / OFC-7917F / OFC-7919F


Fanless and Low Power Atom N270 Open Frame Computer

Front View

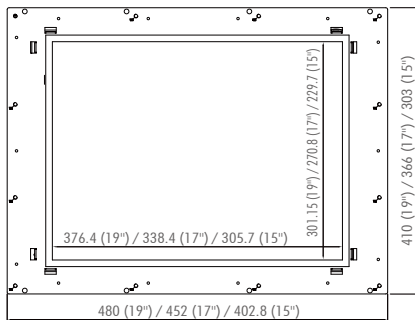


Rear View

OFC-7915F

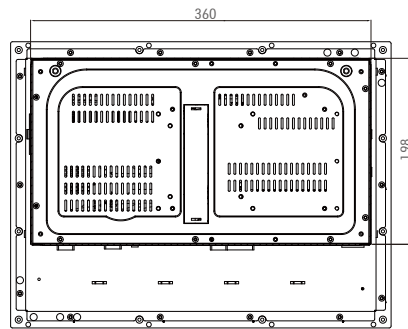


Side View


OFC-7915F

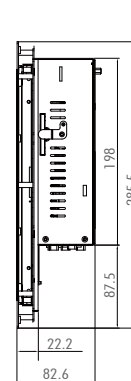

OFC-7917F

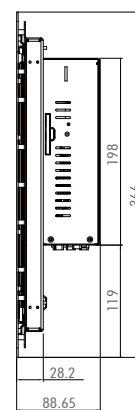

OFC-7919F

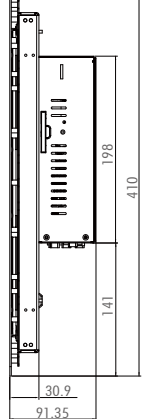

Unit: mm

Specification

Systems

CPU Support	Intel® Atom N270 CPU on board
Chipset	Intel® 945GSE + ICH7M
Memory Support	1 x 200-Pin DDRII SO-DIMM, supports DDR2 400/533
Max. System Memory	2GB
Open Frame	YES
Sound	HD Codec
Power Supply	DC 24Vin, 100W power supply
O.S. Support	Windows 7 / XP / XPE
Wall Mount Type	VESA standard
Dimension (W x H x D)	15": 402mm x 300mm x 82mm 17": 452mm x 366mm x 88.6mm 19": 480mm x 410mm x 91.3mm
System Weight	15": 5.3Kg / 17": 7.1Kg / 19": 9.5Kg

I/O Ports

USB	4 x USB2.0
KB / Mouse	2 x PS/2 Port
Audio	1 x Line in, 1 x Line out, 1 x MIC in
Serial Port	4 x COM port (all COM ports support +5V or +12V), COM 2 for RS232/422/485 selectable
Parallel Port	1 x Parallel Port
Digital I/O Port	8 in / 8 out
LAN	2 x LAN (10/100/1000 Mbps)
VGA	1 x VGA
Drive Bays	1 x 2.5" SATA HDD, 1 x IDE CF slot on board, 1 x slim SATA CD-ROM

Display

LCD	15" (XGA) / 17" (SXGA) / 19" (SXGA)
Touch Screen	5W Analog resistive (USB interface)
Max. Resolution	1024 x 768 (15") / 1280 x 1024 (17", 19")
Pixel Pitch	0.297 x 0.297 (15") / 0.264 x 0.264 (17") / 0.294 x 0.294 (19")
Brightness	350 cd/m ² (15") / 380 cd/m ² (17") / 300 cd/m ² (19")

Environment

Operating Temp.	0° ~ 40°C (32°~104°F)
Storage Temp.	-20° ~ 60°C (-4°~140°F)
Humidity	20% ~ 90%
Certificate	CE, FCC

Ordering Information

OFC-7915F	15" Fanless Intel® ATOM (N270) CPU + 945GSE Panel PC, w/ 15" 1024 x 768 LCD / 5-Wire ELO Touch / 24V 100W DC Power
OFC-7917F	17" Fanless Intel® ATOM (N270) CPU + 945GSE Panel PC, w/ 17" 1280 x 1024 LCD / 5-Wire ELO Touch
OFC-7919F	19" Fanless Intel® ATOM (N270) CPU + 945GSE Panel PC, w/ 19" 1280 x 1024 LCD / 5-Wire ELO Touch
52-002-02861001	24Vdc output power adaptor
PPC7915-WirelessLan-KIT	Wireless LAN module

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Dec. 2009.