

# PPC

## PPC-7520/7520F 10.4" Panel PC

### Features and Benefits:

- Totally fanless and quiet design (for PPC7520F)
- Low power consumption and economical solution
- On-board IDE interface, Type II Compact Flash slot
- Compact size with high performance
- High precision touchscreen



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan  
Tel: +886-2-8751-1111  
Fax: +886-2-8751-1199  
Email: sales@protech.com.tw  
<http://www.protech.com.tw>




ISO CERTIFIED  
9001 | 14001


# PPC-7520/7520F

10.4" Panel PC


Front View

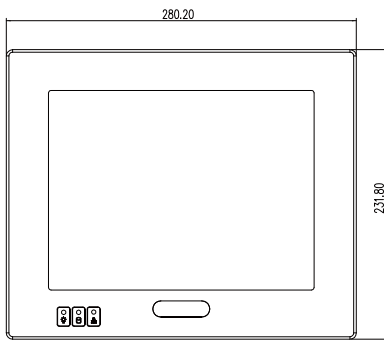



Rear View

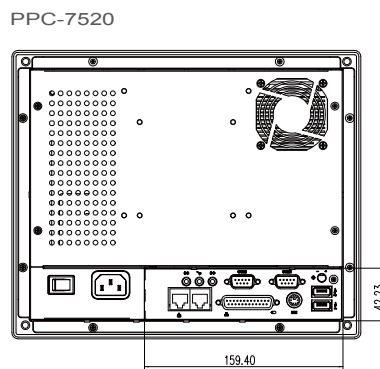

PPC-7520F

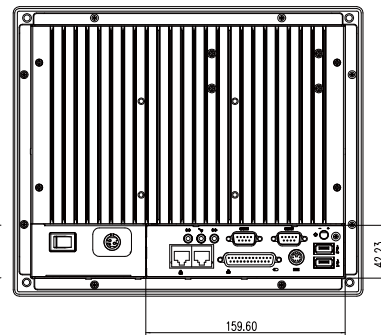

Side View

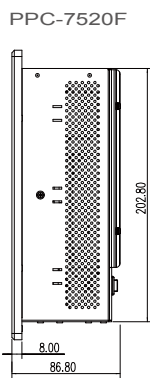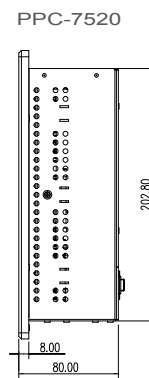

Unit: mm

## Specification Systems

<b>CPU Support</b>	PPC-7520: Intel® Celeron® M 1.5GHz CPU (up to 1.8GHz) PPC-7520F: Intel® Celeron® M ULV 1.0 GHz CPU on board
<b>Chipset</b>	Intel® 910GML E + ICH6M
<b>Memory Support</b>	1 x 200-pin DDR2 SO-DIMM, 512MB DDR2 SO-DIMM (up to 2GB)
<b>Front Bazel</b>	Aluminum
<b>Power Supply</b>	PPC-7520: AC110W power supply PPC-7520F: DC 24Vin 80W power supply
<b>Drive Bay</b>	1 x 2.5" SATA HDD, 1 x IDE CF slot on board
<b>O.S. Support</b>	Windows XP/XPE/CE.net, Linux Redhat 8.0/9.0
<b>Dimension (W x H x D)</b>	PPC-7520: 280 x 232 x 80 mm (11.02" x 9.13" x 3.15") PPC-7520F: 280 x 232 x 87 mm (11.02" x 9.13" x 3.43")
<b>System Weight</b>	PPC-7520: 6Kg PPC-7520F: 6.5Kg
<b>Certificate</b>	CE / FCC / UL

## I/O Ports

<b>USB</b>	2 x USB 2.0
<b>KB / Mouse</b>	1 x PS/2 port ( KB/MS for Y-cable)
<b>Audio</b>	1 x Line-in, 1 x Line-out, 1 x Mic-in

<b>Serial Port</b>	2 x COM port (COM 1 for RS-232, COM 2 for RS232/RS422/RS485 selectable, All COM ports support +5V/+12V selectable)
<b>Parallel Port</b>	1 x parallel port (SPP/EPP/ECP, share with Digital I/O )
<b>Digital I/O</b>	4 in / 4 out (share with parallel port)
<b>LAN</b>	2 x LAN (1 x 10/100, 1 x 10/100/1000)
<b>Brightness Control</b>	VR on rear panel
<b>Expansion Slots</b>	1 x PCI 104 (for PPC-7520 only)

## Display

<b>LCD</b>	10.4" TFT LCD
<b>Max. Resolution</b>	800 x 600
<b>Brightness</b>	250 cd/m <sup>2</sup>
<b>Touch Screen</b>	5W Analog resistive (USB interface)

## Environment

<b>Operating Temp.</b>	0° ~ 40°C
<b>Storage Temp.</b>	-20° ~ 60°C
<b>Humidity</b>	20% ~ 90%

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Apr. 2009.